
## **Yuxiang Yang**

List of Publications by Year in descending order

Source: https://exaly.com/author-pdf/3275275/publications.pdf Version: 2024-02-01

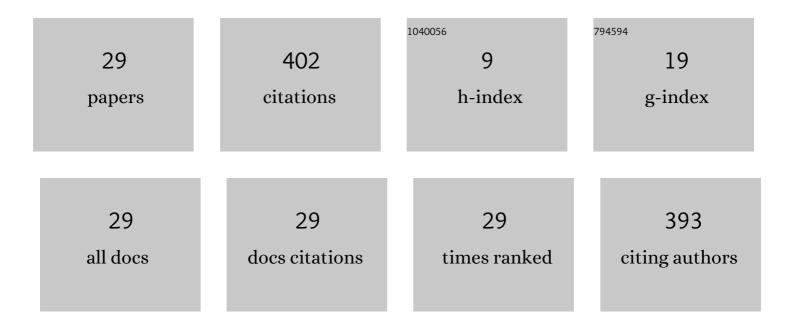

ΥΠΧΙΑΝΟ ΥΑΝΟ

| #  | Article   | lF  | CITATIONS |
|----|---|-----|-----------|
| 1  | A Voltage Sag Detection Method Based on Modified S Transform With Digital Prolate Spheroidal<br>Window. IEEE Transactions on Power Delivery, 2021, 36, 997-1006.                          | 4.3 | 15        |
| 2  | A Novel Method for Estimating the Fractional Cole Impedance Model Using Single-Frequency DC-Biased Sinusoidal Excitation. Circuits, Systems, and Signal Processing, 2021, 40, 543-558.    | 2.0 | 7         |
| 3  | A Simplified Time-Domain Fitting Method Based on Fractional Operational Matrix for Cole Parameter Estimation. IEEE Transactions on Instrumentation and Measurement, 2020, 69, 1566-1575.  | 4.7 | 8         |
| 4  | Numerical estimation of Fricke–Morse impedance model parameters using single-frequency sinusoidal<br>excitation. Physiological Measurement, 2019, 40, 09NT01.                             | 2.1 | 6         |
| 5  | Wideband mirrored current source design based on differential difference amplifier for electrical bioimpedance spectroscopy. Biomedical Physics and Engineering Express, 2018, 4, 025032. | 1.2 | 12        |
| 6  | Nearâ€binary multisine design with arbitrary sparse spectrum for fast BIS measurement. IET Science,<br>Measurement and Technology, 2018, 12, 448-455.                                     | 1.6 | 1         |
| 7  | Design of tri-level excitation signals for broadband bioimpedance spectroscopy. Physiological<br>Measurement, 2015, 36, 1995-2007.  | 2.1 | 9         |
| 8  | Design of a quasi-logarithmically spaced multi-sine signal generator based on FPGA. , 2015, , .   |     | 0         |
| 9  | Multi-frequency simultaneous measurement of bioimpedance spectroscopy based on a low crest factor multisine excitation. Physiological Measurement, 2015, 36, 489-501.                     | 2.1 | 26        |
| 10 | An improved crest factor minimization algorithm to synthesize multisines with arbitrary spectrum.<br>Physiological Measurement, 2015, 36, 895-910.  | 2.1 | 38        |
| 11 | Comparative Study of Influence of Noise on Power Frequency Estimation of Sine wave Using<br>Interpolation FFT. Fluctuation and Noise Letters, 2014, 13, 1450019.                          | 1.5 | 7         |
| 12 | Broadband Bioimpedance Spectroscopy Based on a Multifrequency Mixed Excitation and Nuttall<br>Windowed FFT Algorithm. Mathematical Problems in Engineering, 2014, 2014, 1-9.              | 1.1 | 3         |
| 13 | Development of a Stair-Step Multifrequency Synchronized Excitation Signal for Fast Bioimpedance<br>Spectroscopy. BioMed Research International, 2014, 2014, 1-8.                          | 1.9 | 5         |
| 14 | Performance Comparison of Windowed Interpolation FFT and Quasisynchronous Sampling Algorithm for Frequency Estimation. Mathematical Problems in Engineering, 2014, 2014, 1-7.             | 1.1 | 8         |
| 15 | Frequency Estimation of Distorted and Noisy Signals in Power Systems by FFT-Based Approach. IEEE<br>Transactions on Power Systems, 2014, 29, 765-774.                                     | 6.5 | 69        |
| 16 | Design and Preliminary Test of a Palm Bio-impedance Spectroscopy Measurement System for Biometric<br>Authentication. , 2014, , .  |     | 6         |
| 17 | Track C. Biomedizinische Technik, 2014, 59, s144-262.   | 0.8 | 3         |
| 18 | Overlapping community detection algorithms in complex networks based on the fuzzy spectral clustering. , 2013, , .  |     | 0         |

YUXIANG YANG

| #  | ARTICLE  | IF  | CITATIONS |
|----|--|-----|-----------|
| 19 | Improved Cole parameter extraction based on the least absolute deviation method. Physiological Measurement, 2013, 34, 1239-1252.                         | 2.1 | 35        |
| 20 | Optimized Trapezoid Convolution Windows for Harmonic Analysis. IEEE Transactions on Instrumentation and Measurement, 2013, 62, 2609-2612.                | 4.7 | 12        |
| 21 | Pornographic images detection using High-Level Semantic features. , 2011, , .  |     | 9         |
| 22 | Design of a wideband excitation source for fast bioimpedance spectroscopy. Measurement Science and Technology, 2011, 22, 013001.                         | 2.6 | 20        |
| 23 | Accuracy improvement by A three-reference calibration algorithm for a bioimpedance spectrometer. , 2010, , .   |     | 4         |
| 24 | Design and preliminary evaluation of an air-alternating wheelchair seating system for pressure ulcer prevention. , 2010, , .                             |     | 2         |
| 25 | Design of an air-alternating anti-decubitus wheelchair seating system. , 2009, , .   |     | 2         |
| 26 | Waveform synthesis of multi-frequency sinusoids with 2 <sup>n</sup> th primary harmonics<br>based on Walsh functions. , 2009, , .                        |     | 4         |
| 27 | Design and preliminary evaluation of a portable device for the measurement of bioimpedance spectroscopy. Physiological Measurement, 2006, 27, 1293-1310. | 2.1 | 74        |
| 28 | New Tetrapolar Method for Complex Bioimpedance Measurement: Theoretical Analysis and Circuit Realization. , 2005, 2005, 6605-7.                          |     | 6         |
| 20 | A Design of Bioimpedance Spectrometer for Farly Detection of Pressure Illcer 2005 2005 6602-4  |     | 11        |